

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1341.1061/JDH

First Named Inventor or Application Identifier:

Hironobu KAGEYAMA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents,
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 44]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 6]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No:

18. CORRESPONDENCE ADDRESS



21171

PATENT TRADEMARK OFFICE

Staas & Halsey

NEW APPLICATION FEE TRANSMITTAL

Attorney Docket No.	1341.1061/JDH
Application Number	New
Filing Date	September 8, 2000
AMOUNT ENCLOSED	\$730.00
First Named Inventor	Hironobu KAGEYAMA

FEE CALCULATION (fees effective 12/29/99)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS	5	- 20 =	0	X \$ 18.00 =	\$ 0.00
INDEPENDENT CLAIMS	3	- 3 =	0	X \$ 78.00 =	0.00
MULTIPLE DEPENDENT CLAIMS (any number; if applicable)				+ \$260.00 =	
				BASIC FILING FEE	690.00
				Total of above Calculations =	\$ 690.00
Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)					+
Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).					+
				TOTAL FILING FEE =	\$ 690.00
Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))					+
Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))					40.00
				TOTAL FEES DUE =	\$ 730.00

METHOD OF PAYMENT

- ☒ Check enclosed as payment.
- ☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
- ☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.

GENERAL AUTHORIZATION

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No.


19-3935

Deposit Account Name

STAAS & HALSEY LLP

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY LLP

Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	September 8, 2000

POWER SUPPLY DEVICE

FIELD OF THE INVENTION

The present invention relates to a power supply device
5 for supplying electric power to an information processor, such
as a server, and more particularly to a power supply device
in which a parallel redundancy structure is adopted.

BACKGROUND OF THE INVENTION

10 Recently, according to the massive spread of the
Internet, high reliability and cost performance are required
for an information processor, such as a server, that forms the
core of the Internet. Here, the reliability and the cost of
an information processor are largely influenced by the
15 reliability of the power supply device by which electric power
is supplied to the information processor. Thus, high
reliability and cost performance are required also for the
power supply device.

Fig. 5 is a block diagram showing the structure of a power
20 supply 10 in the prior art. The power supply 10 shown in this
drawing is mounted in an information processor (whose drawing
is omitted), such as a server, converts an AC voltage source
 V_{AC} into a DC voltage supply V_{DC} , and supplies this DC voltage
supply V_{DC} to a load 20. As this load 20, a printed board circuit
25 mounted in an information processor, a magnetic disk unit, or

the like are given.

The power supply 10 is provided with n power supply units 11_1 to 11_n . Respective these power supply units 11_1 to 11_n are identically constituted wherein a parallel redundancy structure is adopted so that even when the DC voltage supply output of at least one power supply unit is stopped, the load 20 is not influenced by other power supply units. These power supply units 11_1 to 11_n are inserted into plural slots provided inside the information processor, respectively, and are provided with a function by which hot-line maintenance can be executed without stopping the supply of the DC voltage supply to the load 20.

The power supply unit 11_1 is inserted between a feeder terminal TA_1 and the load 20, converts the AC voltage source V_{AC} supplied to the feeder terminal TA_1 into a DC voltage supply V_{DC1} , and supplies this DC voltage supply V_{DC1} to the load 20. In the power supply unit 11_1 , a main power supply unit 12_1 is provided with an AC/DC (Alternating Current/Direct Current) converting function and converts the AC voltage source V_{AC} into the DC voltage supply V_{DC1} . The main power supply unit 12_1 supplies the DC voltage supply V_{DC1} to the load 20 via a power supply cable (whose drawing is omitted).

A main power supply control section 13_1 is provided in the main power supply unit 12_1 and performs an ON/OFF control of the AC/DC converting function and abnormality monitoring

of the main power supply unit 12₁. When abnormality occurs in the main power supply unit 12₁, the main power supply control section 13₁ transmits an abnormality detection signal to a unit side control section 17₁. A diode 14₁ is an element provided in the downstream side of the main power supply unit 12₁, and preventing a rush current from flowing in the main power supply unit 12₁ when the power supply unit 11₁ is inserted in the slot of the information processor. A control power supply unit 15₁ is inserted between the feeder terminal TA₁ and a main control section 30 and converts the AC voltage source V_{ac} supplied to the feeder terminal TA₁ into a DC voltage supply V_{A1}, a DC voltage supply V_{B1}, and a DC voltage supply V_{C1}.

The control power supply unit 15₁ supplies the DC voltage supply V_{A1} to the main power supply control section 13₁, the DC voltage supply V_{B1} to the unit side control section 17₁, and the DC voltage supply V_{C1} to a DC/DC converting section 31 of the main control section 30, respectively. That is, in the power supply units 11₁, the control power supply unit 15₁ supplying the DC voltage supply to a control system including the main power supply control section 13₁, the unit side control section 17₁, and the main control section 30 (the DC/DC converting section 31) is provided, separated from the main power supply unit 12₁. As the control power supply unit 15₁, the one provided with a DC/DC converting function for converting the DC voltage supply V_{dc} from the main power supply

unit 12₁ into a predetermined value of DC voltage supply may also be employed.

A diode 16₁ is an element provided in the downstream side of the control power supply unit 15₁ and preventing a rush
5 current from flowing in the control power supply unit 15₁ when the power supply unit 11₁ is inserted in the slot of the information processor. The unit side control section 17₁ is connected to the main control section 30 via an interface 18₁ and works as a communication interface between the main power
10 supply control section 13₁ and the main control section 30.

Concretely, the unit side control section 17₁ has the function by which an ON/OFF control signal from the main control section 30 is received via the interface 18₁ and is transmitted to the main power supply control section 13₁ and
15 the function by which an abnormality detection signal from the main power supply control section 13₁ is received and is transmitted to the main control section 30 via the interface 18₁.

The power supply units 11_n of the number n is inserted
20 between a feeder terminal TA_n and the load 20, converts the AC voltage source V_{Ac} supplied to the feeder terminal TA_n into a DC voltage supply V_{Dcn}, and supplies this DC voltage supply V_{Dcn} to the load 20. In the power supply unit 11_n, a main power supply unit 12_n is identically constituted with the main power
25 supply unit 12₁ and converts the AC voltage source V_{Ac} into the

DC voltage supply V_{DCn} . A main power supply unit 12_n supplies the DC voltage supply V_{DCn} to the load 20 via a power supply cable (whose drawing is omitted).

A main power supply control section 13_n is provided in
5 the main power supply unit 12_n and performs an ON/OFF control of the AC/DC converting function and abnormality monitoring of the main power supply unit 12_n . When abnormality occurs in the main power supply unit 12_n , the main power supply control section 13_n transmits an abnormality detection signal to a unit
10 side control section 17_n . A diode 14_n is an element provided in the downstream side of the main power supply unit 12_n and preventing a rush current from flowing in the main power supply unit 12_n when the power supply unit 11_n is inserted in the slot of the information processor. A control power supply unit 15_n
15 is inserted between the feeder terminal TA_n and the main control section 30 and converts the AC voltage source V_{AC} supplied to the feeder terminal TA_n into a DC voltage supply V_{An} , a DC voltage supply V_{Bn} , and a DC voltage supply V_{Cn} .

The control power supply unit 15_n supplies the DC voltage
20 supply V_{An} to the main power supply control section 13_n , the DC voltage supply V_{Bn} to the unit side control section 17_n , and the DC voltage supply V_{Cn} to the DC/DC converting section 31 of the main control section 30, respectively. That is, in the power supply units 11_n , the control power supply unit 15_n
25 supplying the DC voltage supply to a control system including

the main power supply control section 13_n, the unit side control section 17_n, and the main control section 30 (the DC/DC converting section 31) is provided, separated from the main power supply unit 12_n, similarly to the power supply units 11₁.

5 A diode 16_n is an element provided in the downstream side of the control power supply unit 15_n and preventing a rush current from flowing in the control power supply unit 15_n when the power supply unit 11_n is inserted in the slot of the information processor. The unit side control section 17_n is
10 connected to the main control section 30 via an interface 18_n and works as a communication interface between the main power supply control section 13_n and the main control section 30.

 Concretely, the unit side control section 17_n has the function by which an ON/OFF control signal from the main
15 control section 30 is received via the interface 18_n and is transmitted to the main power supply control section 13_n and the function by which an abnormality detection signal from the main power supply control section 13_n is received and is transmitted to the main control section 30 via the interface
20 18_n.

 The main control section 30 is connected to the unit side control sections 17₁ to 17_n via the interfaces 18₁ to 18_n and performs ON/OFF controls and abnormality monitoring of the power supply units 11₁ to 11_n (the main power supplies 12₁ to
25 12_n). The DC/DC converting section 31 is provided in the main

control section 30, converts the DC voltage supply V_c (the DC voltage supplies V_{c1} to V_{cn}) supplied from the control power supply units 15₁ to 15_n into a predetermined value of DC voltage supply, and supplies this to each section of the main control section 30.

In the structure described above, the AC voltage source V_{ac} supplied to the feeder terminal TA_1 is converted into the DC voltage supply V_{A1} , the DC voltage supply V_{B1} , and the DC voltage supply V_{c1} by the control power supply unit 15₁. These DC voltage supplies V_{A1} , V_{B1} , and V_{c1} are supplied to the main power supply control section 13₁, the unit side control section 17₁, and the DC/DC converting section 31. With this, the main power supply control section 13₁, the unit side control section 17₁, and the main control section 30 become in operable states. At this time, it is supposed that the AC/DC converting function of the main power supply unit 12₁ is in an OFF state, and the DC voltage supply V_{DC1} is not outputted from the main power supply unit 12₁.

Similar operations to that of the power supply units 11₁ are performed in the power supply units 11₂ (now shown) to 11_n, at the same time as the operation described above. That is, the AC voltage source V_{ac} supplied to the feeder terminal TA_n is converted into the DC voltage supply V_{An} , the DC voltage supply V_{Bn} , and the DC voltage supply V_{cn} by the control power supply unit 15_n. These DC voltage supplies V_{An} , V_{Bn} , and V_{cn} are

supplied to the main power supply control section 13_n, the unit side control section 17_n, and the main control section 30 (the DC/DC converting section 31). With this, the main power supply control section 13_n and the unit side control section 17_n become
5 in the operable state. At this time it is supposed that the AC/DC converting function of the main power supply unit 12_n is in an OFF state, and the DC voltage supply V_{DCn} is not outputted from the main power supply unit 12_n. The main control section 30 is already made operable.

10 When a start switch (not shown) of the main control section 30 is pressed down, an ON signal is transmitted from the main control section 30 to the respective unit side control sections 17₁ to 17_n via the interfaces 18₁ to 18_n in accordance with a predetermined sequence. When the ON signal is received,
15 the unit side control section 17₁ transmits the ON signal to the main power supply control section 13₁. When receiving this ON signal, the main power supply control section 13₁ turns the AC/DC converting function of the main power supply unit 12₁ on. With this the main power supply unit 12₁ converts the AC
20 voltage source V_{AC} supplied to the feeder terminal TA₁ into the DC voltage supply V_{DC1} and then supplies this to the load 20 via the diode 14₁ and the cable (not shown).

Similar operations to that of the power supply units 11₁ is performed in the power supply units 11₂ (now shown) to 11_n,
25 parallel to the operation of the power supply units 11₁. That

is, when the ON signal from the main control section 30 is received, the unit side control section 17_n transmits the ON signal to the main power supply control section 13_n. When receiving this ON signal, the main power supply control section 13_n turns the AC/DC converting function of the main power supply unit 12_n on. With this the main power supply unit 12_n converts the AC voltage source V_{AC} supplied to the feeder terminal TA_n into the DC voltage supply V_{DCn} and then supplies this to the load 20 via the diode 14_n and the cable (not shown).

When abnormality occurs in the main power supply unit 12₁ and the output of the DC voltage supply V_{DC1} from the main power supply unit 12₁ is stopped, the main power supply control section 13₁ transmits the abnormality detection signal to the unit side control section 17₁. When receiving this abnormality detection signal, the unit side control section 17₁ transmits the abnormality detection signal to the main control section 30 via the interface 18₁. When receiving the abnormality detection signal, the main control section 30 generates a main abnormality alarm showing that abnormality has occurred in the main power supply unit 12₁.

Next, another structural example of a conventional power supply device will be explained referring to Fig. 6. Fig. 6 is a block diagram showing the structure of a conventional power supply device 40. In this drawing, like reference numerals are attached to the sections corresponding to the

respective sections of Fig. 5. In Fig. 6, external control power supply units 50_1 and 50_2 , a feeder terminal TB_1 , and a feeder terminal TB_2 are newly provided, and power supply units 41_1 to 41_n are provided as substitutes for the power supply units 11_1 to 11_n shown in Fig. 5.

The external control power supply unit 50_1 converts the AC voltage source V_{AC} supplied to the feeder terminal TB_1 into a DC voltage supply V_{G1} and supplies this to a control system including the unit side control sections 17_1 to 17_n and the DC/DC converting section 31 of the main control section 30 (the main control section 30) via a cable (not shown). This external control power supply unit 50_1 is composed of an AC/DC converting section 51_1 converting the AC voltage source V_{AC} into the DC voltage supply V_{G1} and a diode 52_1 provided in the downstream side of the AC/DC converting section 51_1 . This diode 52_1 is an element for preventing a rush current.

The external control power supply unit 50_2 is juxtaposed with the external control power supply unit 50_1 , converts the AC voltage source V_{AC} supplied to the feeder terminal TB_2 into a DC voltage supply V_{G2} , and supplies this to the control system including the unit side control sections 17_1 to 17_n and the DC/DC converting section 31 (the main control section 30) via a cable (not shown). This external control power supply unit 50_2 is composed of an AC/DC converting section 51_2 converting the AC voltage source V_{AC} into the DC voltage supply V_{G2} and

a diode 52_2 provided in the downstream side of the AC/DC converting section 51_2 . This diode 52_2 is an element for preventing a rush current.

These external control power supplies 50_1 and 50_2 are constituted as a parallel redundancy structure. Accordingly, even when the DC voltage supply output from one of the external control power supplies 50_1 and 50_2 is stopped, stable supply of the DC voltage supply to the unit side control sections 17_1 to 17_n and the main control section 30 is performed by the other.

In the power supply unit 41_1 , a rush current prevention circuit 42_1 is an element provided in the downstream side of the unit side control section 17_1 and preventing a rush current from flowing in the unit side control section 17_1 when the power supply unit 41_1 is inserted in a slot of an information processor. The DC voltage supply V_{G1} and the DC voltage supply V_{G2} from the external control power supply units 50_1 and 50_2 are supplied to the unit side control section 17_1 via a cable (not shown) and the rush current prevention circuit 42_1 as a DC voltage supply V_{B1} .

In the power supply unit 41_n , a rush current prevention circuit 42_n is an element provided in the downstream side of the unit side control section 17_n and preventing a rush current from flowing in the unit side control section 17_n when the power supply unit 41_n is inserted in a slot of the information processor. The DC voltage supply V_{G1} and the DC voltage supply

V_{G2} from the external control power supplies 50_1 and 50_2 are supplied to the unit side control section 17_n via a cable (not shown) and the rush current prevention circuit 42_n as a DC voltage supply V_{Bn} . The DC voltage supply V_{G1} and the DC voltage supply V_{G2} from the external control power supplies 50_1 and 50_2 are supplied to the DC/DC converting section 31 of the main control section 30 via a cable (not shown) as a DC voltage supply V_c .

In the structure described above, the AC voltage source V_{Ac} supplied to the feeder terminal TA_1 is converted into a DC voltage supply V_{A1} by a control power supply unit 15_1 . This DC voltage supply V_{A1} is supplied to the main power supply control section 13_1 . With this, the main power supply control section 13_1 becomes in the operable state. At this time, it is supposed that the AC/DC converting function of the main power supply unit 12_1 is in an OFF state, and the DC voltage supply V_{Dc1} is not outputted from the main power supply unit 12_1 .

Similar operations to that of the power supply units 41_1 are performed in the power supply units 41_2 (now shown) to 41_n , at the same time as the operation described above. That is, the AC voltage source V_{Ac} supplied to the feeder terminal TA_n is converted into a DC voltage supply V_{An} by the control power supply unit 15_n . This DC voltage supply V_{An} is supplied to the main power supply control section 13_n . With this, the main

power supply control section 13_n becomes in the operable state. At this time, it is supposed that the AC/DC converting function of the main power supply unit 12_n is in an OFF state, and the DC voltage supply V_{DCn} is not outputted from the main power supply unit 12_n.

The AC voltage source V_{AC} supplied to the feeder terminal TB_1 is converted into the DC voltage supply V_{G1} by the AC/DC converting section 51₁ of the external control power supply unit 50₁, at the same time as the operations of the control power supplies 15₁ to 15_n described above. Similarly, the AC voltage source V_{AC} supplied to the feeder terminal TB_2 is converted into the DC voltage supply V_{G2} by the AC/DC converting section 51₂ of the external control power supply unit 50₂.

The DC voltage supplies V_{G1} and V_{G2} are supplied to the DC/DC converting section 31 of the main control section 30 via the diodes 52₁ and 52₂ and the cables (not shown) as the DC voltage supply V_c . With this, the main control section 30 becomes in the operable state. Further, the DC voltage supplies V_{G1} and V_{G2} are supplied to the unit side control sections 17₁ to 17_n via the diodes 52₁ and 52₂, the cables (not shown), and the rush current prevention circuits 42₁ to 42_n as the DC voltage supplies V_{B1} to V_{Bn} . With this, the unit side control sections 17₁ to 17_n become in the operable state.

When a start switch (not shown) of the main control section 30 is pressed down, an ON signal is transmitted from

the main control section 30 to the respective unit side control sections 17₁ to 17_n via the interfaces 18₁ to 18_n in accordance with a predetermined sequence. With this, through the operations described above, the DC voltage supplies V_{DC1} to V_{DCn} are outputted from the main power supplies 12₁ to 12_n. These DC voltage supplies V_{DC1} to V_{DCn} are supplied to the load 20 as the DC voltage supply V_{DC} .

Here, when abnormality occurs in the control power supply unit 15₁, the unit side control section 17₁ becomes in the communication abnormality state in which communication is impossible with the main power supply control section 13₁. At this time since being supplied the DC voltage supplies V_{e1} and V_{e2} from the external control power supplies 50₁ and 50₂, the unit side control section 17₁ is in an operable state regardless of abnormality of the control power supply unit 15₁. When detecting the communication abnormality, the unit side control section 17₁ transmits an abnormality detection signal showing that abnormality has occurred inside the power supply units 41₁ to the main control section 30 via the interface 18₁. When receiving this abnormality detection signal, the main control section 30 generates a power supply unit abnormality alarm showing that abnormality has occurred in the power supply units 41₁.

Since the conventional power supply 10 shown in Fig. 5 is constituted so as to supply the DC voltage supplies to both

of the main power supply control section 13₁ and the unit side control section 17₁ from one control power supply unit 15₁ inside the power supply units 11₁ as described above, for example, when the control power supply unit 15₁ fails, both
5 functions of the main power supply control section 13₁ and the unit side control section 17₁ stop simultaneously.

Accordingly, in this case, since the abnormality detection signal is not outputted from the unit side control section 17₁ to the main control section 30, an extremely serious
10 problem from a maintenance point of view occurs in which abnormality in the power supply units 11₁ cannot totally be recognized in the main control section 30.

On the other hand, since the power supply device 40 shown in Fig. 6 is constituted so as to supply the DC voltage supplies
15 individually to the main power supply control section 13₁ and the unit side control section 17₁ by the dual circuits power supply including the external control power supplies 50₁ and 50₂ and the control power supply unit 15₁, the problem such as that of the power supply 10 described above does not occur.

20 However, since the power supply device 40 is constituted in such a manner that the external control power supplies 50₁ and 50₂ are separately provided for the power supply units 41₁ to 41_n, the number of power supplies increases compared with that of the power supply 10 and extra space and cables are needed,
25 thereby resulting in the problem that the device costs more.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a power supply device by which the cost can be reduced and the reliability can be enhanced.

5 In order to attain the above described object, the invention according to first aspect is characterized in a power supply device comprising a plurality of power supply units (corresponding to power supply units 101₁ to 101_n of a first embodiment described later) each comprising a main power
10 supply unit (corresponding to main power supply units 12₁ to 12_n of the first embodiment described later) generating a load voltage to be supplied to a load, a control unit (corresponding to unit side control sections 17₁ to 17_n of the first embodiment described later) informing the outside of the result of
15 abnormality monitoring of each section, and a control power supply unit (corresponding to control power supply units 15₁ to 15_n of the first embodiment described later) generating a controlling voltage to be supplied to the control unit, said power supply units being constituted as a parallel redundancy
20 structure, wherein each said control unit in the plural power supply units is parallel connected to the control power supply units in other power supply units in addition to the control power supply unit in the power supply unit thereof.

 According to this invention, the load voltages are
25 supplied from each main power supply unit in the plural power

supply units to the load. The controlling voltages are supplied from each control power supply unit in the plural power supply units to the control unit. Paying attention to the control unit in one power supply unit, the control unit
5 not only receives the supply of the controlling voltage from the control power supply unit in the power supply unit thereof but also receives the supplies of the controlling voltages from the control power supplies in other power supply units.

Even when abnormality occurs in the control power supply
10 unit in the power supply unit thereof and the output of the controlling voltage from this control power supply unit stops, the controlling voltages are supplied from the control power supplies in other power supply units to the control unit of the power supply unit thereof. That is, this control unit
15 continues the normal operation thereof regardless of the abnormality of the control power supply unit in the power supply unit thereof. Therefore, this control unit detects the abnormality in the power supply unit thereof and informs the outside of this monitoring result.

20 As described above, since the invention according to first aspect is constituted in such a manner that the controlling voltages are parallel supplied not only from the control power supply unit in the power supply unit thereof but also from the control power supply units in other power supply
25 units to the control unit in the power supply unit thereof,

even when abnormality occurs in the control power supply unit in the power supply unit thereof, the control unit in question can receive the supplies of the controlling voltages from the control power supply units in other power supply units so as
5 to inform the outside of the abnormality in the power supply unit thereof, thereby enabling the enhancement of the reliability.

Further, since the invention according to first aspect is constituted in such a manner that the controlling voltages as a backup is supplied from the control power supply units in other power supply units to the control unit in the power supply unit thereof, the number of power supplies and the number of cables can be reduced compared with the case in which control power supplies are separately provided in the outside
10 as in the prior art, thereby enabling the reduction of the cost.
15

The invention according to second aspect is characterized in that the power supply of first aspect further comprises converting unit (corresponding to DC/DC converting sections 202₁ to 202_n of a second embodiment described later)
20 being inserted in the upstream side of the control unit, converting the inputted controlling voltage into a constant controlling voltage, and supplying the controlling voltage to the control unit.

According to this invention, the load voltages are
25 supplied from each main power supply unit in the plural power

supply units to the load. The controlling voltages are supplied from each control power supply unit in the plural power supply units to the control unit via the converting unit. Paying attention to the control unit in one power supply unit, 5 the control unit not only receives the supply of the controlling voltage from the control power supply unit in the power supply unit thereof but also receives the supplies of the controlling voltages from the control power supply units in other power supply units.

10 Even when abnormality occurs in the control power supply unit in the power supply unit thereof and the output of the controlling voltage from this control power supply unit stops, the controlling voltages are supplied from the control power supply units in other power supply units to the control unit 15 of the power supply unit thereof via the converting unit. At this time the converting unit converts the inputted controlling voltages into the constant controlling voltage and supplies this to the control unit.

Thus, even when a line drop is generated between the 20 control unit in the power supply unit thereof and the control unit in other power supply units, the constant controlling voltage is always supplied to the control unit in the power supply unit thereof without being influenced by the line drop. That is, this control unit continues its normal operation 25 regardless of the abnormality of the control power supply unit

in the power supply unit thereof. Therefore, this control unit detects the abnormality in the power supply unit thereof and informs the outside of this monitoring result.

As described above, since the invention according to
5 second aspect is constituted in such a manner that the converting unit is provided to compensate for the line drop so that the constant controlling voltage is always supplied to the control unit, the reliability can be further enhanced.

The invention according to third aspect is characterized
10 in that the power supply of first or second aspects further comprises rush current prevention unit (corresponding to diodes 14₁ to 14_n, diodes 16₁ to 16_n, and rush current prevention circuits 102₁ to 102_n of the first and second embodiments described later) being provided in each downstream side of the
15 main power supply unit, the control power supply unit, and the control unit so as to prevent a rush current from flowing in.

Since this invention is constituted in such a manner that the flowing of a rush current into the power supply units is prevented even when the power supply units are hot-line
20 connected by providing the rush current prevention unit, hot-line maintenance can safely be executed.

The invention according to fourth aspect is characterized in a power supply comprising a power supply unit comprising a main power supply unit generating a load voltage
25 to be supplied to a load, a control unit informing the outside

of the result of abnormality monitoring of each section, and
a control power supply unit generating a controlling voltage
to be supplied to the control unit, said power supply unit
constituting part of a parallel redundancy structure along
5 with other power supply units, wherein said control unit is
parallel connected to the control power supplies in the other
power supply units in addition to the control power supply unit
of the power supply unit thereof.

Since this invention is constituted in such a manner that
10 the controlling voltages are parallel supplied to the control
unit in the power supply unit thereof not only from the control
power supply unit in the power supply unit thereof but also
from the control power supplies in other power supply units,
even when abnormality occurs in the control power supply unit
15 in the power supply unit thereof, this control unit can receive
the supplies of the controlling voltages from the control power
supplies in other power supply units so as to inform the outside
of the abnormality in the power supply unit thereof, thereby
enabling the enhancement of the reliability.

20 Further, since this invention is constituted in such a
manner that the controlling voltages as a backup is supplied
from the control power supply units in other power supply units
to the control unit in the power supply unit thereof, the number
of power supplies and the number of cables can be reduced
25 compared with the case in which control power supply units are

separately provided in the outside as in the prior art, thereby enabling the reduction of the cost.

The invention according to fifth aspect is characterized in a power supply comprising a power supply unit comprising
5 a control unit informing the outside of the result of abnormality monitoring of each section and a control power supply unit generating a controlling voltage to be supplied to the control unit, said power supply unit constituting part of a parallel redundancy structure along with other power
10 supply units, wherein said control unit is parallel connected to the control power supply units in the other power supply units in addition to the control power supply unit of the power supply unit thereof.

Since this invention is constituted in such a manner that
15 the controlling voltages are parallel supplied to the control unit in the power supply unit thereof not only from the control power supply unit in the power supply unit thereof but also from the control power supplies in other power supply units, even when abnormality occurs in the control power supply unit
20 in the power supply unit thereof, this control unit can receive the supplies of the controlling voltages from the control power supplies in other power supply units so as to inform the outside of the abnormality in the power supply unit thereof, thereby enabling the enhancement of the reliability.

25 Further, since this invention is constituted in such a

manner that the controlling voltages as a backup is supplied from the control power supply units in other power supply units to the control unit in the power supply unit thereof, the number of power supplies and the number of cables can be reduced compared with the case in which control power supply units are
5 separately provided in the outside as in the prior art, thereby enabling the reduction of the cost.

Other objects and features of this invention will become understood from the following description with reference to
10 the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the structure of a first embodiment according to the present invention.

15 Fig. 2 is a block diagram showing the structure of a second embodiment according to the present invention.

Fig. 3 is a circuit diagram showing a concrete structure of the second embodiment.

Fig. 4 is a view showing voltage characteristics in the
20 second embodiment.

Fig. 5 is a block diagram showing the structure of the conventional power supply 10.

Fig. 6 is a block diagram showing the structure of the conventional power supply device 40.

25

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the below, first embodiment and second embodiment according to the present invention will be explained in detail referring to drawings.

5 Fig. 1 is a block diagram showing the structure of the first embodiment according to the present invention. In a power supply 100 shown in this drawing, like reference numerals are attached to the sections corresponding to the respective sections of Fig. 5. In Fig. 1, power supply units 101_1 to 101_n are provided as substitutes for the power supply units 11_1 to 11_n shown in Fig. 5, and rush current prevention circuits 102_1 to 102_n are newly provided.

10 In the power supply unit 101_1 , the rush current prevention circuit 102_1 is an element inserted between the cathode of a diode 16_1 and the unit side control section 17_1 and preventing a rush current from flowing in the unit side control section 17_1 when the power supply unit 101_1 is inserted in a slot of an information processor (whose drawing is omitted).

15 A DC voltage supply is supplied to the unit side control section 17_1 via dual feeder paths of a feeder path L_{11} and a backup feeder path L_{12} . That is, a DC voltage supplies V_{B1} from the control power supply unit 15_1 is supplied to the unit side control section 17_1 via the feeder path L_{11} (the diode 16_1).
20 When the control power supply unit 15_1 fails and feeding via
25

the feeder path L_{11} stops, a backup DC voltage supply V_{B1}' from a control power supply units 15_2 (not shown) to 15_n is supplied to the unit side control section 17_1 via the backup feeder path L_{12} instead of the feeder path L_{11} .

5 In the power supply unit 101_n , the rush current prevention circuit 102_n is an element inserted between the cathode of a diode 16_n and the unit side control section 17_n similarly to the rush current prevention circuit 102_1 and preventing a rush current from flowing in the unit side control
10 section 17_n when the power supply unit 101_n is inserted in a slot of the information processor.

A DC voltage supply is supplied to the unit side control section 17_n via dual feeder paths of a feeder path L_{n1} and a backup feeder path L_{n2} . That is, a DC voltage supplies V_{Bn} from
15 a control power supply unit 15_n is supplied to the unit side control section 17_n via the feeder path L_{n1} (the diode 16_n).

When the control power supply unit 15_n fails and feeding via the feeder path L_{n1} stops, a backup DC voltage supply V_{Bn}' from the control power supply units 15_1 to 15_{n-1} (not shown)
20 is supplied to the unit side control section 17_n via the backup feeder path L_{n2} instead of the feeder path L_{n1} . Each structure of the power supply units 101_2 to 101_{n-1} (whose drawings are omitted) are the same as the structure of the power supply unit 101_1 and the power supply unit 101_n described above.

25 In the structure described above, the AC voltage source

V_{Ac} supplied to the feeder terminal TA_1 is converted into a DC voltage supply V_{A1} , a DC voltage supply V_{B1} , and a DC voltage supply V_{C1} by the control power supply unit 15₁. These DC voltage supplies V_{A1} and V_{C1} are supplied to the main power supply control section 13₁ and the DC/DC converting section 31. With this, the main power supply control section 13₁ and the main control section 30 become in the operable state.

The DC voltage supply V_{B1} from the control power supply unit 15₁ is supplied to the unit side control section 17₁ via the rush current prevention circuit 102₁ through the feeder path L_{11} . At this time, it is supposed that an AC/DC converting function of the main power supply unit 12₁ is in an OFF state, and the DC voltage supply V_{Dc1} is not outputted from the main power supply unit 12₁.

Similar operations to that of the power supply units 101₁ are also performed in the power supply units 101₂ (now shown) to 101_n, at the same time as the operation described above. That is, the AC voltage source V_{Ac} supplied to the feeder terminal TA_n is converted into a DC voltage supply V_{An} , a DC voltage supply V_{Bn} , and a DC voltage supply V_{Cn} by the control power supply unit 15_n. These DC voltage supplies V_{An} and V_{Cn} are supplied to the main power supply control section 13_n and the DC/DC converting section 31.

With this, the main power supply control section 13_n and the main control section 30 becomes in the operable state. The

DC voltage supply V_{Bn} from the control power supply unit 15_n is supplied to the unit side control section 17_n via the rush current prevention circuit 102_n through the feeder path L_{n1} . At this time, it is supposed that the AC/DC converting function of the main power supply unit 12_n is in an OFF state and the DC voltage supply V_{Dcn} is not outputted from the main power supply unit 12_n .

When a start switch (not shown) of the main control section 30 is pressed down, an ON signal is transmitted from the main control section 30 to the respective unit side control sections 17_1 to 17_n via the interfaces 18_1 to 18_n in accordance with a predetermined sequence. When the ON signal is received, the unit side control section 17_1 transmits the ON signal to the main power supply control section 13_1 . When receiving this ON signal, the main power supply control section 13_1 turns the AC/DC converting function of the main power supply unit 12_1 on. With this the main power supply unit 12_1 converts the AC voltage source V_{Ac} supplied to the feeder terminal TA_1 into the DC voltage supply V_{Dc1} and then supplies this to the load 20 via the diode 14_1 and the cable (not shown).

Similar operations to that of the power supply units 101_1 are also performed in the power supply units 101_2 (now shown) to 101_n , at the same time as the operation of the power supply unit 101_1 . That is, when the ON signal from the main control section 30 is received, the unit side control section 17_n

transmits the ON signal to the main power supply control section 13_n. When receiving this ON signal, the main power supply control section 13_n turns the AC/DC converting function of the main power supply unit 12_n on. With this the main power supply unit 12_n converts the AC voltage source V_{AC} supplied to the feeder terminal TA_n into the DC voltage supply V_{DCn} and then supplies this to the load 20 via the diode 14_n and the cable (not shown).

When abnormality occurs in the control power supply unit 15₁, feeding the DC voltage supply from the control power supply unit 15₁ to the main power supply control section 13₁ and the unit side control section 17₁ stops. At this time the backup DC voltage supply V_{B1} ' from the control power supply units 15₂ (not shown) to 15_n is supplied to the unit side control section 17₁ via the backup feeder path L₁₂ instead of the feeder path L₁₁. Thus, the unit side control section 17₁ continues its normal operation regardless of the abnormality of the control power supply unit 15₁.

The unit side control section 17₁ may become in a communication abnormality state in which it cannot communicate with the main power supply control section 13₁. With this the unit side control section 17₁ transmits an abnormality detection signal showing that abnormality has occurred inside the power supply units 101₁ to the main control section 30 via the interface 18₁. When receiving this abnormality detection

signal, the main control section 30 generates a power supply unit abnormality alarm showing that abnormality has occurred in the power supply units 101₁.

As explained above, since the first embodiment is constituted in such a manner that the backup DC voltage supply V_{B1}' is parallel supplied to the unit side control section 17₁ from the control power supply units 15₂ (not shown) to 15_n in other power supply units 101₂ to 101_n in addition to the DC voltage supply V_{B1} from the control power supply unit 15₁ in the power supply unit thereof (e.g., the power supply unit 101₁), even when abnormality occurs in the control power supply unit 15₁, the unit side control section 17₁ can receive the supply of the backup DC voltage supply V_{B1} from other control power supply units 15₂ to 15_n so as to inform the outside of abnormality in the power supply unit 101₁. Thus, the reliability can be enhanced.

Further, according to the present invention regarding the first embodiment, since the number of power supplies and the number of cables can be reduced compared with the case in which the external control power supply units 50₁ and 50₂ are separately provided in the outside as in the conventional power supply 40 (refer to Fig. 6), the cost can be reduced.

Moreover, since the first embodiment is constituted in such a manner that the flowing of a rush current into the power supply units 101₁ to 101_n is prevented even when the power supply

units 101₁ to 101_n are hot-line connected by providing the diodes 14₁ to 14_n, the diodes 16₁ to 16_n, and the rush current prevention circuits 102₁ to 102_n, hot-line maintenance can safely be executed.

5 Fig. 2 is a block diagram showing the structure of the second embodiment according to the present invention. Fig. 3 is a circuit diagram showing a concrete structure of the second embodiment. In a power supply device 200 shown in these drawings, like reference numerals are attached to the sections
10 corresponding to the respective sections of Fig. 1. In Fig. 2, power supply units 201₁ to 201_n and control power supplies 203₁ to 203_n are provided as substitutes for the power supply units 101₁ to 101_n and the control power supplies 15₁ to 15_n shown in Fig. 1, and DC/DC converting sections 202₁ to 202_n
15 are newly provided.

 The main power supply unit 12₁ shown in Fig. 3 comprises a diode bridge circuit 209 full-wave rectifying the AC voltage source V_{AC} , a choking coil 210, a switching element 211 switchingly controlled by an ON/OFF control section 220
20 described later so as to improve the power factor, a smoothing capacitor 212, a diode 213, and a transformer 214. A switching element 215 is inserted in a primary side coil 214a of the transformer 214 so as to stabilize the DC voltage supply V_{DC1} . A rectifying-smoothing circuit composed of diodes 216, 217,
25 a choking coil 218, and a smoothing capacitor 219 is connected

in a secondary side coil 214b of the transformer 214.

In the main power supply control section 13₁, the ON/OFF control section 220, 221 ON/OFF control the switching element 211, 215 based on an ON/OFF control signal from the unit side control section 17₁ described later. A voltage abnormality monitor circuit 222 is a circuit for monitoring voltage abnormality, such as an overvoltage and a low voltage, based on the result of a comparison between a reference DC voltage supply of a reference dc power supply 223 and the DC voltage supply V_{DC1} . This voltage abnormality monitor circuit 222 transmits an abnormality detection signal to an MPU (Micro Processing Unit) 240 of the unit side control section 17₁ as the monitor result when detecting voltage abnormality.

A control power supply unit 203₁ is inserted between the main power supply unit 12₁ and the DC/DC converting section 31 and has a DC/DC converting function for converting a DC voltage supply V_{D1} into predetermined values of DC voltage supply V_{A1} and DC voltage supply V_{C1} , respectively, taking the voltage between terminals of the smoothing capacitor 212 of the main power supply unit 12₁ (the DC voltage supply V_{D1} may be, for example, 380 volts) as an input. This control power supply unit 203₁ has a transformer 224 with a primary coil 224a, secondary coils 224b, 224c. In this primary coil 224a, a switching element 225 is inserted for stabilizing the DC voltage supply V_{A1} and the DC voltage supply V_{C1} . This switching

element 225 is ON/OFF controlled by an ON/OFF control section 226.

A rectifying-smoothing circuit composed of a diode 227 and a smoothing capacitor 228 is connected in the secondary coil 224b. The DC voltage supply V_{A1} from this rectifying-smoothing circuit is supplied to each section of the main power supply control section 13₁. A rectifying-smoothing circuit composed of a diode 229 and a smoothing capacitor 230 is connected in the secondary coil 224c. The DC voltage supply V_{C1} from this rectifying-smoothing circuit is supplied to the DC/DC converting section 31 (the main control section 30) via the diode 16₁.

A voltage abnormality monitor circuit 242 is a circuit for monitoring voltage abnormality, such as an overvoltage and a low voltage, based on the result of a comparison between a reference DC voltage supply of a reference dc power supply 243 and the DC voltage supply V_{C1} . This voltage abnormality monitor circuit 242 transmits an abnormality detection signal to the MPU 240 of the unit side control section 17₁ as the monitor result when detecting voltage abnormality.

The rush current prevention circuit 102₁ is composed of resistances 231 to 234, a capacitor 235, and a switching element 236 and restrains a rush current in such a manner that the switching element 236 is ON/OFF controlled by the time constant of the resistances 231 to 234 and the capacitor 235.

The DC/DC converting section 202₁ has a DC/DC converting function in which the DC voltage supply V_{B1} or the backup DC voltage supply V_{B1}' inputted are converted into a constant value of constant DC voltage supply V_{IN1} as shown in Fig. 4. The
5 constant DC voltage supply V_{IN1} is the operation guarantee voltage of the unit side control section 17₁ and is, for example, 5 volts. The DC/DC converting sections 202₁ is composed of capacitors 237, 238 and a regulator 239, and this regulator 239 is a power supply element for stabilizing the constant DC
10 voltage supply V_{IN1} .

The unit side control section 17₁ is connected to the main control section 30 via the interface 18₁ and works as a communication interface between the main power supply control section 13₁ and the main control section 30. This unit side
15 control section 17₁ is composed of the MPU 240 and an interface control section 241.

Concretely, the interface control section 241 receives the ON/OFF control signal from the main control section 30 via the interface 18₁ and sends it to the MPU 240. The MPU 240
20 transmits the ON/OFF control signal to the ON/OFF control sections 220, 221 of the main power supply control section 13₁. The MPU 240 receives the abnormality detection signal from the voltage abnormality monitor circuits 222, 242 of the main power supply control section 13₁ and sends this to the interface
25 control section 241. The interface control section 241

transmits the abnormality detection signal to the main control section 30 via the interface 18₁.

Similarly, in the power supply unit 201_n, the DC/DC converting section 202_n converts the inputted DC voltage supply V_{Bn} or backup DC voltage supply V_{Bn}' into a constant value of constant DC voltage supply V_{Inn} as shown in Fig. 4. The constant DC voltage supply V_{Inn} is the operation guarantee voltage of the unit side control section 17_n and is, for example, 5 volts. The control power supply unit 203_n is inserted between the main power supply unit 12_n and the DC/DC converting section 31 and has the DC/DC converting function for converting a DC voltage supply V_{Dn} from the main power supply unit 12_n (e.g., 380 volts) into predetermined values of DC voltage supply V_{An} and DC voltage supply V_{Cn} , respectively, taking the DC voltage supply V_{Dn} as an input. The detailed structures of each section of the power supply unit 201_n are the same as the detailed structures of each section of the power supply unit 201₁ described above.

In the structure described above, the AC voltage source V_{Ac} fed to the feeder terminal TA₁ shown in Fig. 2 is converted into the DC voltage supply V_{A1} , the DC voltage supply V_{B1} , and the DC voltage supply V_{C1} by the control power supply unit 203₁. These the DC voltage supplies V_{A1} and V_{C1} are supplied to the main power supply control section 13₁ and the DC/DC converting section 31. With this the main power supply control section

13₁ and the main control section 30 become in the operable state.

The DC voltage supply V_{B1} from the control power supply unit 203₁ is supplied to the DC/DC converting section 202₁ via the rush current prevention circuit 102₁ through the feeder path L_{11} . Here, the line drop in the feeder path L_{11} is approximately zero volts since the path length is short. The DC voltage supply V_{B1} is supposed to be 8 volts shown in Fig. 4. The DC voltage supply V_{B1} is converted into 5 volts of constant DC voltage supply V_{IN1} shown in Fig. 4 by means of the DC/DC converting section 202₁. Since this constant DC voltage supply V_{IN1} is supplied to the unit side control section 17₁, the unit side control section 17₁ becomes in the operable state. At this time, it is supposed that the AC/DC converting function of the main power supply unit 12₁ is in the OFF state, and the DC voltage supply V_{DC1} is not outputted from the main power supply unit 12₁.

Similar operations to that of the power supply units 201₁ are performed in the power supply units 201₂ (now shown) to 201_n, at the same time as the operation described above. The AC voltage source V_{AC} supplied to the feeder terminal TA_n is converted into the DC voltage supply V_{An} , the DC voltage supply V_{Bn} , and the DC voltage supply V_{Cn} by the control power supply unit 203_n. These DC voltage supplies V_{An} and V_{Cn} are supplied to the main power supply control section 13_n and the DC/DC

converting section 31. With this, the main power supply control section 13_n and the main control section 30 become in the operable state.

The DC voltage supply V_{Bn} from the control power supply unit 203_n is supplied to the DC/DC converting section 202_n via the rush current prevention circuit 102_n through the feeder path L_{n1} . Here, the line drop in the feeder path L_{n1} is approximately zero volts since the path length is short. The DC voltage supply V_{Bn} is supposed to be 8 volts shown in Fig. 4. The DC voltage supply V_{Bn} is converted into 5 volts of constant DC voltage supply V_{Inn} shown in Fig. 4 by means of the DC/DC converting section 202_n. Since this constant DC voltage supply V_{Inn} is supplied to the unit side control section 17_n, the unit side control section 17_n becomes in the operable state. At this time, it is supposed that the AC/DC converting function of the main power supply unit 12_n is in the OFF state and the DC voltage supply V_{Dcn} is not outputted from the main power supply unit 12_n.

When a start switch (not shown) of the main control section 30 is pressed down, an ON signal is transmitted from the main control section 30 to the respective unit side control sections 17₁ to 17_n via the interfaces 18₁ to 18_n in accordance with a predetermined sequence. With this, through the operations described above, the DC voltage supplies V_{Dc1} to V_{Dcn} are outputted from the main power supply units 12₁ to 12_n. These

DC voltage supplies V_{DC1} to V_{DCn} are supplied to the load 20 as the DC voltage supplies V_{DC} .

Here, when abnormality occurs in the control power supply unit 203₁ at the time t_1 shown in Fig. 4, feeding the DC voltage supply from the control power supply unit 203₁ to the main power supply control section 13₁ and the unit side control section 17₁ stops. At this time the backup DC voltage supply V_{B1}' from a control power supply units 203₂ (not shown) to 203_n is supplied to the DC/DC converting section 202₁ via the backup feeder path L_{12} instead of the feeder path L_{11} . When the backup feeder path L_{12} (cable length) is long, a line drop V_L is generated in this backup feeder path L_{12} . Therefore, the backup DC voltage supply V_{B1}' decreases by the line drop V_L than the DC voltage supply V_{Bn} (the DC voltage supply V_{B1}) as shown in Fig. 4.

However, the backup DC voltage supply V_{B1}' is converted into 5 volts of constant DC voltage supply V_{TM1} shown in Fig. 4 by means of the DC/DC converting section 202₁ regardless of the line drop V_L . That is, the DC/DC converting section 202₁ performs a voltage compensation for the line drop V_L . Thus, a constant (5 volts) DC voltage supply V_{TM1} shown in Fig. 4 is constantly supplied to the unit side control section 17₁ regardless of abnormality of the control power supply unit 203₁.

The unit side control section 17₁ may become in the

communication abnormality state in which communication is impossible with the main power supply control section 13₁. With this the unit side control section 17₁ transmits an abnormality detection signal showing that abnormality has occurred inside the power supply unit 201₁ to the main control section 30 via the interface 18₁. When receiving this abnormality detection signal, the main control section 30 generates a power supply unit abnormality alarm showing that abnormality has occurred in the power supply units 201₁.

10 As explained above, since the second embodiment is constituted in such a manner that the DC/DC converting sections 202₁ to 202_n are provided to compensate for line drops so that the constant DC voltage supplies V_{1m} to V_{1nn} are always supplied to the unit side control sections 17₁ to 17_n, the reliability
15 can be further enhanced.

 In the above, although the first and second embodiments according to the present invention are explained in detail referring to drawings, concrete structural examples are not limited to these first and second embodiments, and design
20 alteration or the like without departing from the gist of the present invention will be included in the present invention. For example, although the power supplies having the AC/DC converting function are explained in the first and second
 embodiments, the power supplies may have an AC-AC converting
25 function, a DC-AC converting function, or a DC/DC converting

function.

As explained above, since a power supply device according to the present invention is constituted in such a manner that the controlling voltages are parallel supplied not only from the control power supply unit in the power supply unit thereof but also from the control power supply units in other power supply units to the control means in the power supply unit thereof, even when abnormality occurs in the control power supply unit in the power supply unit thereof, the control means can receive the supplies of the controlling voltages from the control power supply units in the other power supply units so as to inform the outside of the abnormality in the power supply unit thereof, thereby producing the effect that the reliability can be enhanced.

Since a power supply device according to the present invention is constituted in such a manner that the controlling voltages as a backup are supplied from the control power supply units in other power supply units to the control means in the power supply unit thereof, the number of power supplies and the number of cables can be reduced compared with the case in which control power supplies are separately provided in the outside as in the prior art, thereby producing the effect that the cost can be reduced.

A power supply according to the present invention is constituted in such a manner that the converting means is

provided to compensate for a line drop so that a constant controlling voltage is always supplied to the control means, thereby producing the effect that the reliability can be further enhanced.

5 A power supply according to the present invention is constituted in such a manner that a rush current prevention means is provided so as to prevent a rush current from flowing in the power supply unit even when the power supply unit is hot-line connected, thereby producing the effect that hot-
10 line maintenance can safely be executed.

 Although the invention has been described with respect to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative
15 constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

WHAT IS CLAIMED IS:

1. A power supply device comprising:

a plurality of power supply units, each of said power supply unit comprising:

5 a main power supply unit generating a load voltage supply to be supplied to a load;

a control unit informing the outside of the result of monitoring of each section;

a control power supply unit generating a controlling
10 voltage to be supplied to the control unit;

wherein said power supply units being constituted as a parallel redundancy structure; and

wherein each of said control unit in the power supply units is parallel connected to the control power supply unit
15 in other power supply units in addition to the control power supply of the power supply unit thereof.

2. The power supply device according to claim 1 further comprising converting unit being inserted in the upstream side
20 of the control unit, converting the inputted controlling voltage supply into a constant controlling voltage supply, and supplying the controlling voltage supply to the control unit.

3. The power supply device according to claim 1 further comprising rush current prevention unit being provided in each downstream side of the main power supply unit, the control power supply unit, and the control unit so as to prevent a rush
5 current from flowing in.

4. A power supply unit comprising:
a main power supply unit generating a load voltage supply to be supplied to a load;
10 a control unit informing the outside of the result of monitoring of each section;
a control power supply unit generating a controlling voltage to be supplied to the control unit;
wherein said power supply unit constituting a part of
15 a parallel redundancy structure of a power supply device along with other power supply units; and
wherein said control unit is parallel connected to the control power supply unit in the other power supply units in addition to the control power supply unit of the power supply
20 unit thereof.

5. A power supply unit comprising:
a control unit informing the outside of the result of monitoring of each section;
25 a control power supply unit generating a controlling

voltage supply to be supplied to the control unit;

wherein said power supply unit constituting a part of a parallel redundancy structure of a power supply device along with other power supply units; and

- 5 wherein said control unit is parallel connected to the control power supply unit in the other power supply units in addition to the control power supply unit of the power supply unit thereof.

ABSTRACT OF THE DISCLOSURE

A power supply device with n power supply units comprises main power supplies generating DC voltage supplies V_{DC1} to V_{DCn} supplied to a load, respectively, unit side control sections
5 each informing a main control section of the result of abnormality monitoring of each section, and control power supplies supplying DC voltage supplies V_{B1} to V_{Bn} to the unit side control sections, respectively. For example, the unit side control section is parallel connected to the control power
10 supply units of other power supply units in addition to the control power supply.

FIG.1

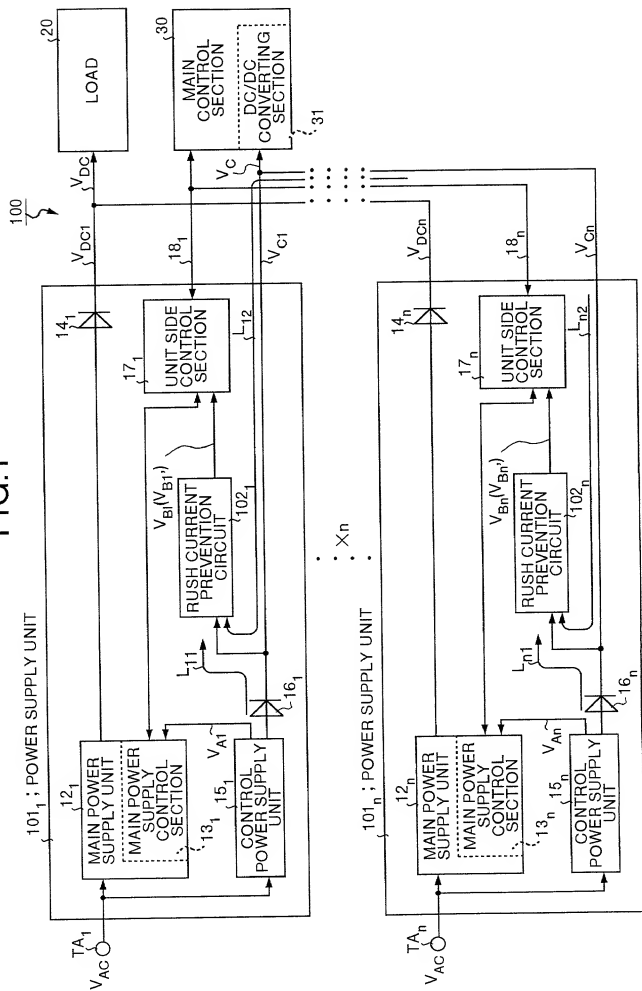


FIG.2

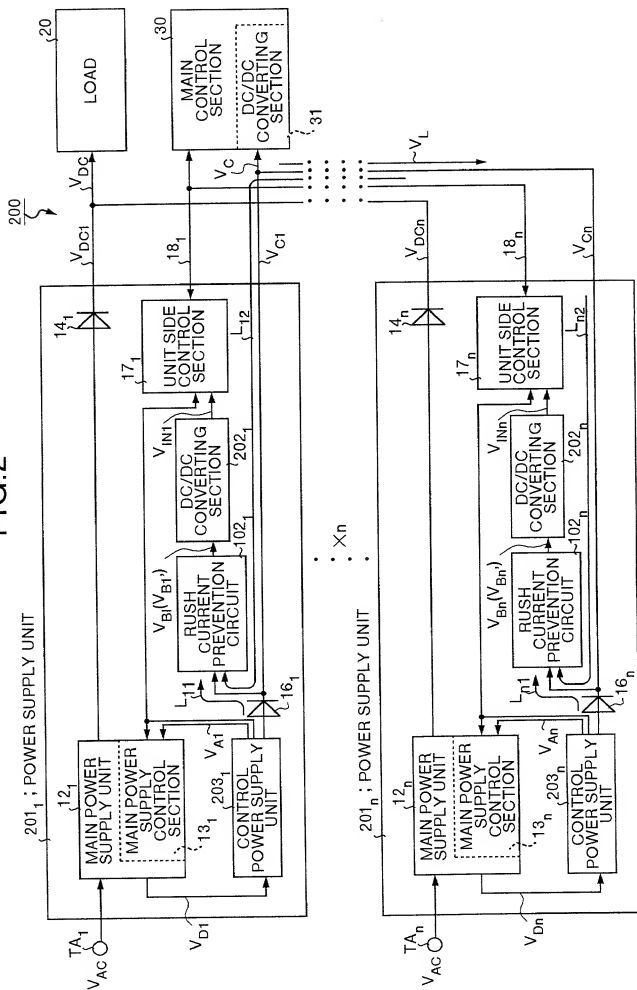


FIG.3

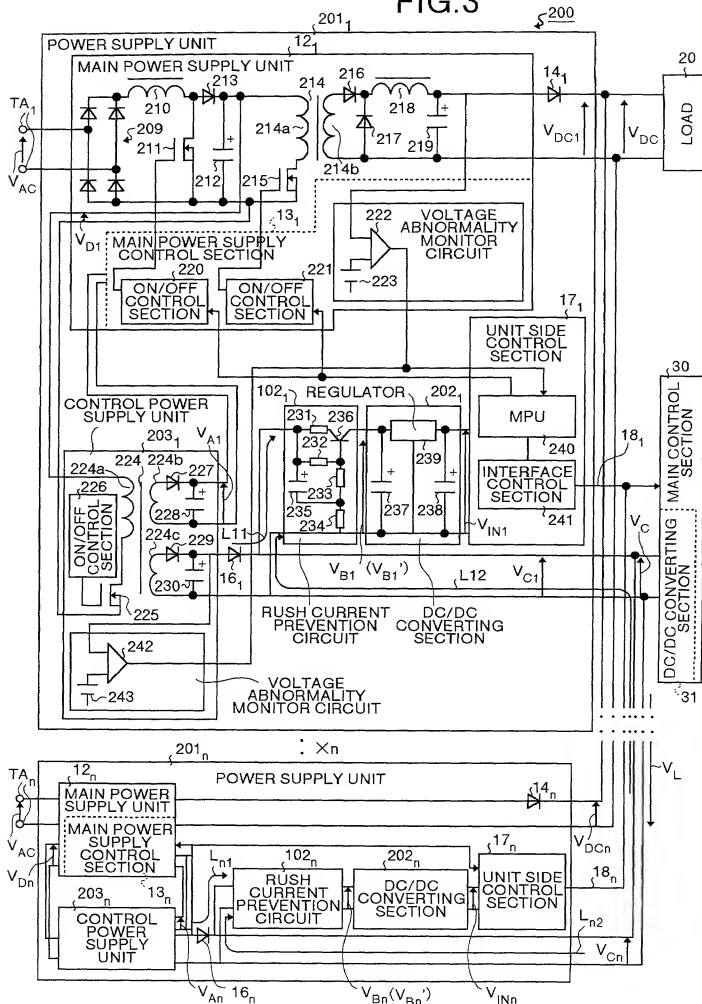


FIG.4

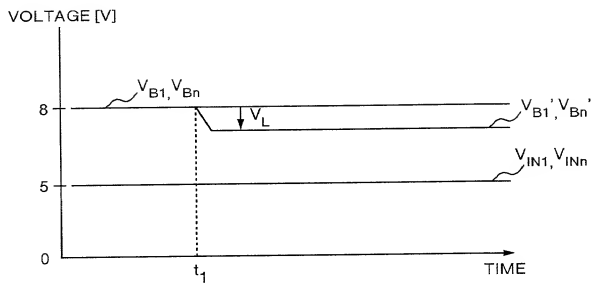


FIG.5


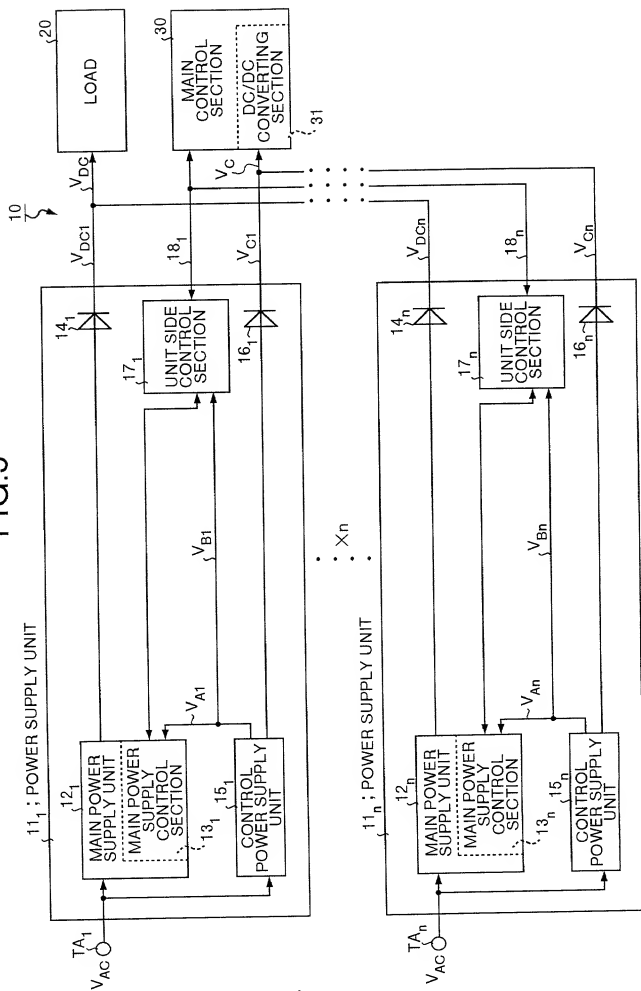


FIG.6

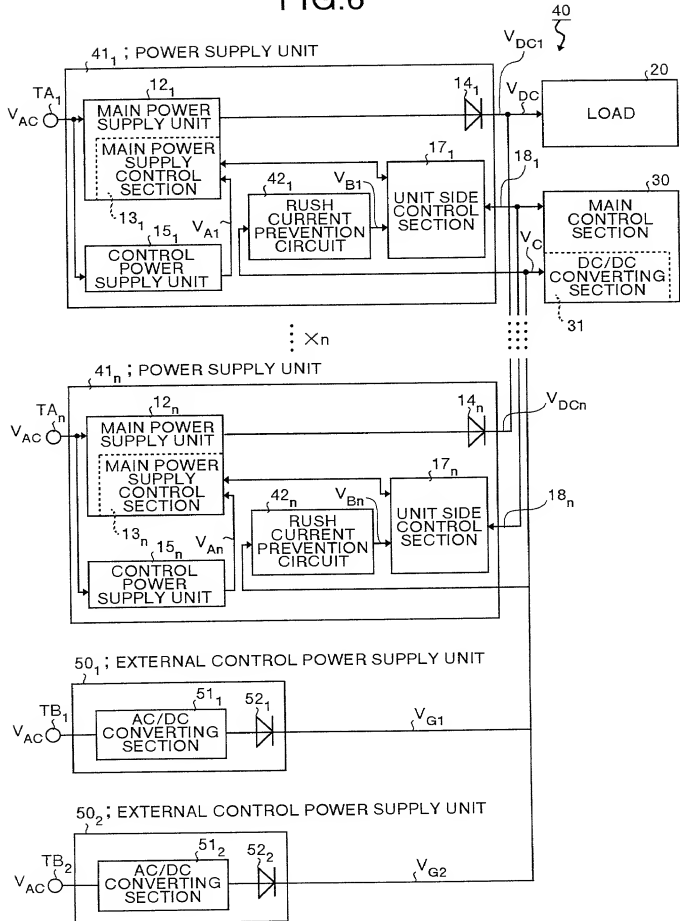

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名を発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であるとして（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

POWER SUPPLY DEVICE

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に出願され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
(if applicable), _____

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則第37編第1章56項に定められるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration (日本語宣言書)

私は、米国特許法第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国で先行出願

11-363523

(Number)
(番号)

Japan

(Country)
(国名)

21/Dec./1999

(Day/Month/Year Filed)
(出願年月日)

Priority Not Claimed

優先権主張なし



(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)



私は、第35編米国特許法119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国特許法第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国特許法第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願を提出日より本出願書の日本国内または特許協力条約国際提出日よりの期間中に入乎された、連邦規則法第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づき表明が全て真実であると信じていること、さらに仮に仮にされた虚偽の表明及びそれと同等の行為は米国特許法第18編第1011条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような虚偽による虚偽の表明を行なえば、申請した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣言を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
 手続を米特許審判局に対して遂行する弁理士または代理人
 として、下記の者を指名いたします。(弁理士、または代理
 人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
 the following attorney(s) and/or agent(s) to prosecute this
 application and transact all business in the Patent and Trademark
 Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
 William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
 I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Mariette, 35,268; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
 Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

送達先

Send Correspondence to:

STAAS & HALSEY
 700 Eleventh Street, N.W.
 Suite 500
 Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
 (202) 434-1500

唯一または第一発明者名		Full name of sole or first inventor	
Hironobu KAGEYAMA			
発明者の署名	日付	Inventor's signature	Date
<i>Hironobu Kageyama</i>			Sep. 5, 2000
住所		Residence	
Kawasaki, Japan			
国籍		Citizenship	
Japanese			
郵便箱		Post Office Address	
c/o FUJITSU LIMITED			
1-1, Kamikodanaka 4-chome,			
Nakahara-ku, Kawasaki-shi,			
Kanagawa 211-8588 Japan			
第二共同発明者		Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便箱		Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名をす
 ること)

(Supply similar information and signature for third and subsequent
 joint inventors.)